




## VIBRATED CURVE CURB

### PRODUCT SPECS

Mass-produced with vibrated concrete with minimum compressive strength class C32/40 (ex Rck 40 N/mm<sup>2</sup>) composed of: carefully selected quarry aggregates, high-strength cement in CEM II/A-LL 42.5 R classes compliant UNI EN 197-1, they form a "dry" mix with low workability (Slump flow S1/S2) and with the addition of specific additives it is able to guarantee water/cement ratios lower than 0.5 in compliance with UNI EN 1340 standard.

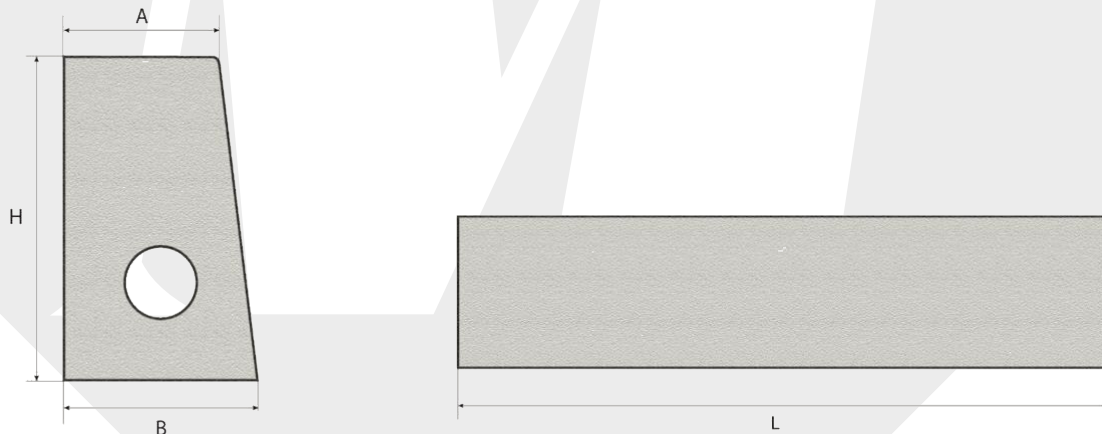

PRODUCT CODE	SECTION (CM)	RADIUS	WEIGHT (KG)	LENGHT	PIECES x CIRCLE
305	10/12 X 25H.	50	48	78	4
306	12/15 X 25H.	50	60	78	4
307	12/15 X 25H.	100	66	67	9
308	12/15 X 25H.	200	71	79	18
309	12/15 X 25H.	400	75	90	28