




MONOLITHIC SHAFT WITH SIPHON

PRODUCT SPECS

Mass-produced with vibrated concrete with minimum compressive strength class C32/40 (ex Rck 40 N/mm²) composed of: carefully selected quarry aggregates, high-strength cement in CEM II/A-LL 42.5 R classes compliant UNI EN 197-1, they constitute a "dry" mix with low workability (Slump flow S1/S2). The reinforcement is made of drawn B450A steel adequately calculated on the basis of normal conditions of use.

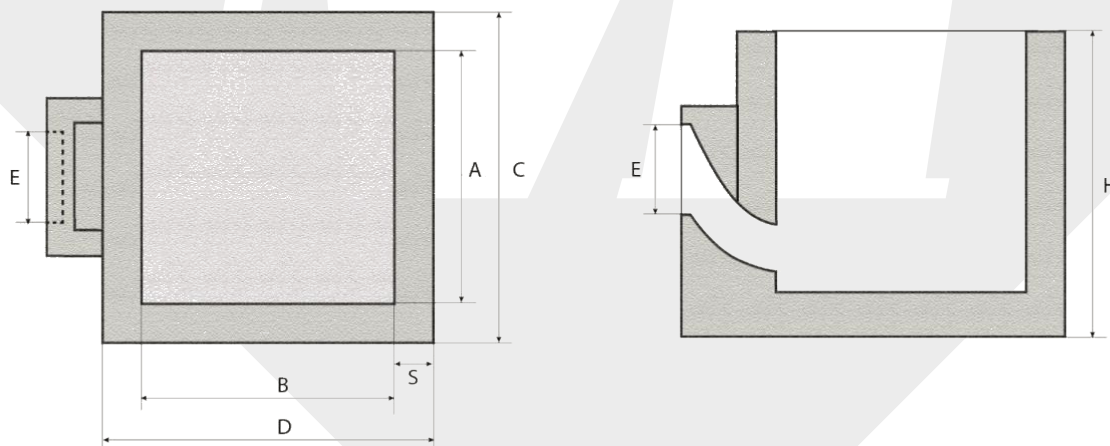

PRODUCT CODE	DESCRIPTION	PRODUCT SIZE (CM)							WEIGHT (KG)
		A	B	C	D	S	H	E	
221	SHAFT	45	45	59	59	7	50	16	220
222	SHAFT	45	45	59	59	7	75	16	308