




VIBRATED CURB

PRODUCT SPECS

Mass-produced with vibrated concrete with minimum compressive strength class C32/40 (ex Rck 40 N/mm²) composed of: carefully selected quarry aggregates, high-strength cement in CEM II/A-LL 42.5 R classes compliant UNI EN 197-1, they form a "dry" mix with low workability (Slump flow S1/S2) and with the addition of specific additives it is able to guarantee water/cement ratios lower than 0.5 in compliance with UNI EN 1340 standard.

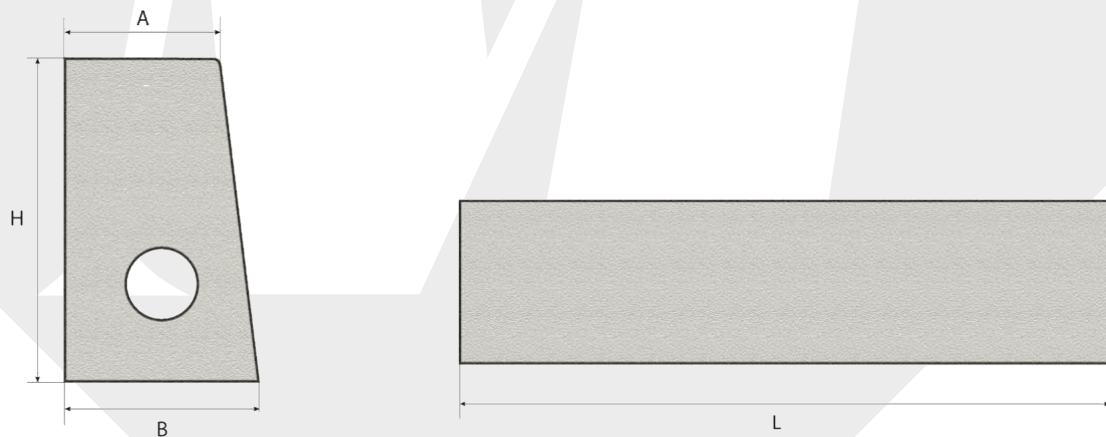

PRODUCT CODE	DESCRIPTION	PRODUCT SIZE (CM)				WEIGHT (KG)
		A	B	H	L	
274	VIBRATED CURB	10	12	25	100	57
275/A	VIBRATED CURB	12	15	25	100	75
278	VIBRATED CURB	16	20	40	100	180
279	JOINT CURB DX/SX 16/20 A 10/12	10	12	25	100	155
		16	20	40		